


Product Data Sheet

Lyra 130 LED Projector

No Driver Required

Collezione Italiana





Hood




Mounting Spike

- Architectural LED surface projector
- Powered by 240V 12W Acriche Seoul LED's (6000°k) nominal lumen 780LM
- Direct mains connection (no driver is required)
- 350 degree rotation, adjustable 45 degree downward angle and 90 degree upwards angle
- Aluminium construction with clear tempered glass
- See wire cage accessories

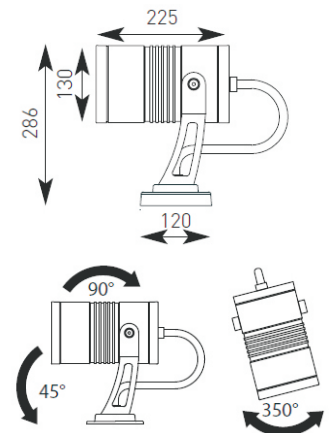

Beam Angles



Photometric Data Available


	Code	Lamp	Description
Projector	ALYLED12/PR/GR	LED 240V	12W Cool White (12° Beam) - Graphite
	ALYLED40/PR/GR	LED 240V	12W Cool White (40° Beam) - Graphite
	ALYLED12/PR/SI	LED 240V	12W Cool White (12° Beam) - Silver
	ALYLED40/PR/SI	LED 240V	12W Cool White (40° Beam) - Silver
Accessories	ALYLEDHOOD/GR	Hood - Graphite	
	ALYLEDHOOD/SI	Hood - Silver	
	ALYLEDSPIKE	Mounting Spike	
	AWC/1	Wire Cage W330 x D435 x H410mm	

Product Data Sheet

Lyra 130 LED Projector


No Driver Required

Collezione Italiana



Hood


- Architectural LED surface projector
- Powered by 240V 12W Acriche Seoul LED's (6000°k) nominal lumen 780LM
- Direct mains connection (no driver is required)
- 350 degree rotation, adjustable 45 degree downward angle and 90 degree upwards angle
- Aluminium construction with clear tempered glass
- See wire cage accessories

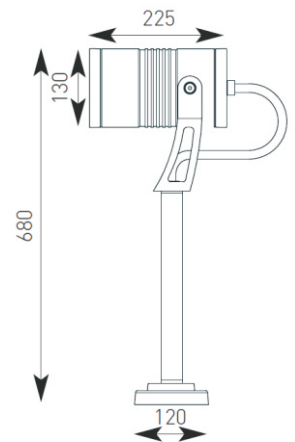

	Code	Lamp	Description
Extension Arm	ALYLED12/EAPR/GR	LED 240V	12W Cool White (12° Beam) - Graphite
Projector	ALYLED40/EAPR/GR	LED 240V	12W Cool White (40° Beam) - Graphite
	ALYLED12/EAPR/SI	LED 240V	12W Cool White (12° Beam) - Silver
	ALYLED40/EAPR/SI	LED 240V	12W Cool White (40° Beam) - Silver
	Accessories	ALYLEDHOOD/GR	Hood - Graphite
	ALYLEDHOOD/SI	Hood - Silver	
	ALYLEDSPIKE	Mounting Spike	
	AWC/1	Wire Cage W330 x D435 x H410mm	



Beam Angles



Photometric Data Available